


产品技术规格书 (Product Technical Specification)

| No. | 名称 (Name) | 规格 (Specification) | No. | 名称 (Name) | 规格 (Specification) | | | |
|-----|-----------------------------------|--------------------|---------|---------------------------------|------------------------------|----------|-------|-------|
| 1 | 型号 (Model) | AZURE-DN0618TM | 12 | 视场角 F.O.V.(DxVxH) | 1/1.8 | 1/2 | 1/3 | |
| 2 | 物料代码 (Material Code) | 3. A01. 120007-A | | | D | 72.46 | 66.8 | 52.18 |
| 3 | 靶面格式 (Image Format) | 1/1.8" | | | H | 58.00 | 55.22 | 42.64 |
| 4 | 分辨率 (Resolution) | 200lp/mm | | | V | 49.50 | 42.64 | 32.56 |
| 5 | 焦距 (Focal Length) | 6.2mm | 13 | 接口 (Mount) | C | | | |
| 6 | 后截距 (Back Focus Length) | 12.01mm | 14 | 适用物距 (Suitable Distance) | 0.2~∞m | | | |
| 7 | F值 (F/No.) | 1.8 | 15 | 最佳物距 (Optimum Working Distance) | 20m | | | |
| 8 | 光圈 (Iris Type) | Manual | 16 | 外形尺寸 (Dimension) | φ36×34.25mm | | | |
| 9 | 畸变 (Distortion) | <-2.9% | 17 | 重量 (Weight) | g | | | |
| 10 | 通光口径 (Lens Effective Diameter) | 前面 (Front) | φ17.7mm | 18 | 工作温度 (Operating Temperature) | -20~+65℃ | | |
| | | 后面 (Back) | φ11.3mm | 19 | 滤镜尺寸 (Filter Thread) | M34×0.5 | | |
| 11 | 光学总长 (TTL) | 49.73mm | 20 | 设计波长 (Design Wavelength) | 400~900nm | | | |

Size:

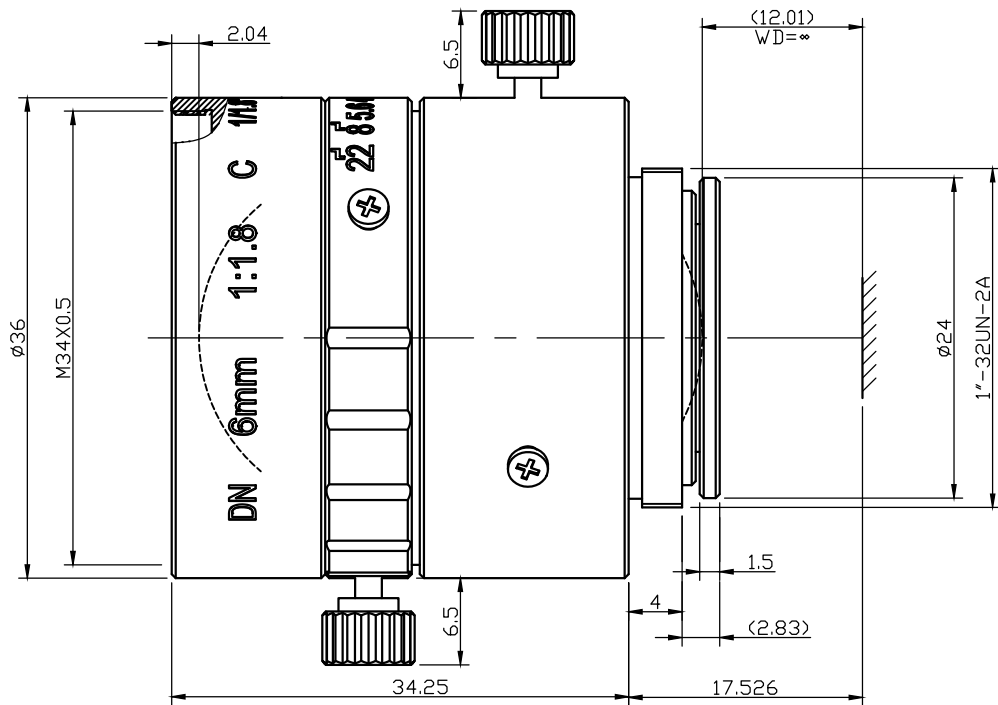

Unit:mm

| Draw | Check | Recheck | Approval | 福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd |
|------|-------|---------|----------|---------------------------------------|
| | | | | |
| | | | | |