


产品技术规格书
(Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)
1	型号 (Model)	AZURE-2428HF	12	视场角 F.O.V.(DxVxH)	°" 43.2mm 4/3 1.2
2	物料代码 (Material Code)	3. A01.010213-A			D 85.00 47.40 42.96
3	靶面格式 (Image Format)	43.2mm			H 74.44 38.43 34.74
4	分辨率 (Resolution)	70lp/mm			V 52.78 29.12 26.27
5	焦距 (Focal Length)	24.6mm	13	接口 (Mount)	F 口
6	后截距 (Back Focus Length)	40mm	14	适用物距 (Suitable Distance)	300~∞mm
7	F 值 (F/No.)	2.8	15	最佳物距 (Optimum Working Distance)	800mm
8	光圈 (Iris Type)	Manual	16	外形尺寸 (Dimension)	φ90×83.38mm
9	畸变 (Distortion)	<-5.2%	17	重量 (Weight)	—
10	通光口径 (Lens Effective Diameter)	前面 (Front) φ55.50mm	18	工作温度 (Operating Temperature)	-20~+65℃
		后面 (Back) φ26.00mm	19	滤镜尺寸 (Filter Thread)	M86×0.75
11	光学总长 (TTL)	122.7mm (WD=∞)	20	设计波长 (Design Wavelength)	400~1000nm

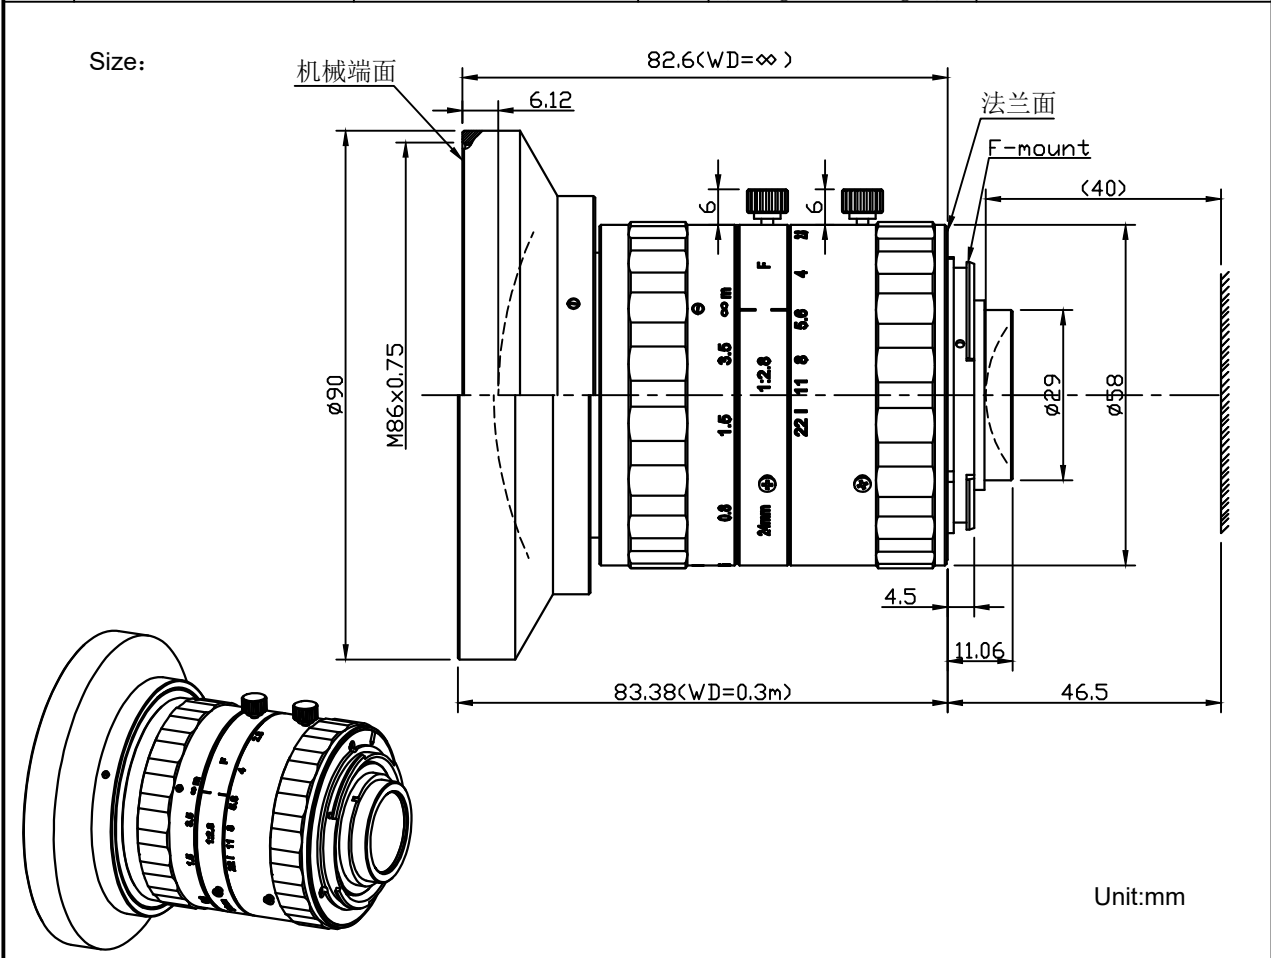

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd